


## Full Height Turnstiles


### PF4000 Full Height Double Turnstile



#### PF4000

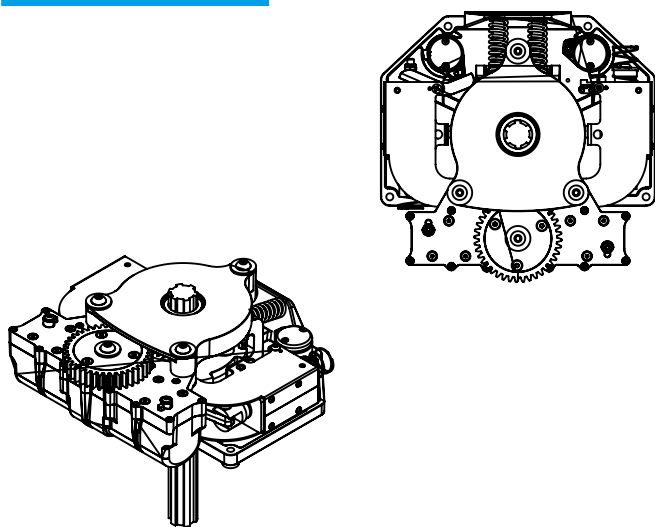

#### Locinox Head Mechanism

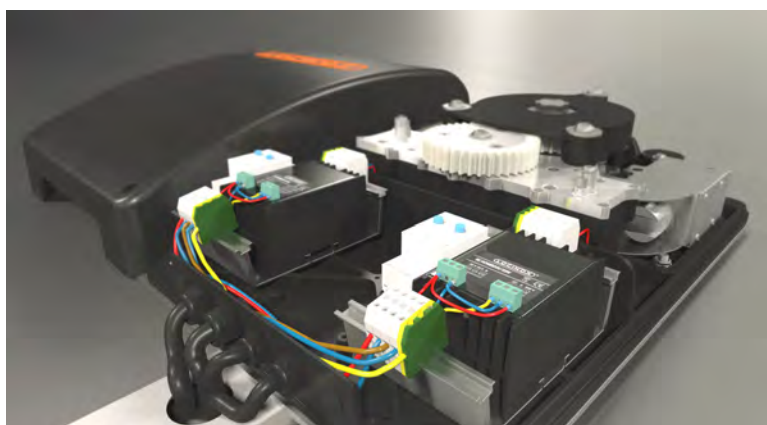

#### PF4000 Optional Extras

- LED Down Lights
- Canopy
- Directional Indicators
- Bespoke Access Control Plates
- 3/4 Height Turnstiles
- Stainless Steel Rotors
- Galvanised

#### Options for Access Control

- Keypad
- Proximity Cards
- Voice/Video Intercom Access
- Token Acceptors

# PF4000 Product Specification

Specification	CE Approved
Flow Rate	15 to 22 Person per Minute in Single Direction
Finish	Powder Coated (Galvanised Optional)
Power Requirements	Single Phase 240Volt 50Hz 5 Amps
Duty Cycle	100% Continuous Duty Rating
Dimensions	Double: 2580mm (2450) x 1400mm x 1790mm
Sizes	Rotor: 76mm Tube with Bottom Support Bearing Arms: 42mm Tube with Capped Ends Side Frames: 33mm Tube Welded to Curve Base Plate
Power Fail Modes	Fail Safe or Fail Secure
Usage	Suitable for Indoor & Outdoor Use
Unit Weight	450Kg Approx

